

In Stock for Fast Shipment



Enclosed Non-Fusible Disconnect Switches from Cooper Bussmann offer Superior Performance

40 to 100 Amp, 600V Versions

- Cover most popular applications
- Horsepower rated
- Agency approvals

Sturdy NEMA 4X Plastic Housings

- Withstand washdown conditions
- Thick wall construction and heavy-duty mounting feet for added strength
- Smaller footprint and deeper box for installation ease
- Hinged cover for easier access
- Entry holes can be placed as needed for wiring ease

Large Pistol Grip Handle

- Easy to grab and operate
- Accepts up to three padlocks for lockout/tagout procedures

Easier Maintenance


- Replacement handles, switches and shafts available

Horsepower Ratings - Volts

Switch Amps	Single-Phase			Three-Phase			
	120	200	240	200-208	240	480	600
40	1	3	3	10	10	20	25
60	2	5	5	15	15	30	30
80	2	5	5	20	20	40	50
100	5	15	15	25	25	50	40

Dimensions - in

Switch Amps	Box			Mounting		Weight
	H	W	D	MH	MW	Lbs
40	6.0	6.0	5.9	6.75	4.0	4.0
60	8.0	6.0	5.9	8.75	4.0	6.0
80	8.0	6.0	5.9	8.75	4.0	6.0
100	10.0	8.0	5.9	10.75	6.0	9.0

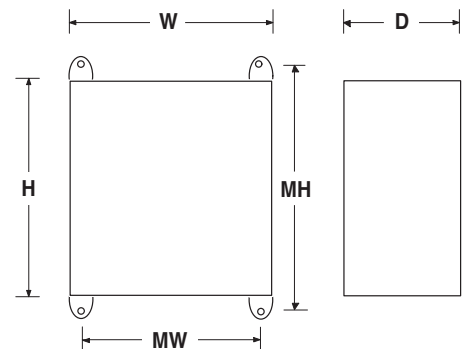

Specifications

Catalog Number	Agency Approvals	Amps	Poles	Volts	Handle Type	Housing Rating	Wire Range
ENF32P-3PB6	cULus, UL*	40	3	600	Pistol	NEMA 4X	18-8 Cu
ENF45P-3PB6	cULus, UL*	60	3	600	Pistol	NEMA 4X	14-1 Cu
ENF63P-3PB6	cULus, UL*	80	3	600	Pistol	NEMA 4X	14-1 Cu
ENF100P-3PB6	cULus, UL**	100	3	600	Pistol	NEMA 4X	8-1/0 Cu

* UL 508, ** UL 98